# PENTAX BINOCULARS MONOCULARS

MB


### PENTAX

Asahi Optical Co., Ltd. C.P.O. 895, Tokyo 100-91, JAPAN
Asahi Optical Europe N.V. Weiveldiaan 3-5, 1930 Zaventem Zuid-7, BELis, UM
Pentax Handelsgesellschaft mbH Postfach 54 0169, 2000 Hamburg 54, WEST GERMANY
Pentax U.K. Limited Pentax House, South Hill Avenue, South Harrow, M. Idlesex HA2 OLT, U.K.
Pentax France S.A. Z.I. Argenteuil, 12, Rue Ambroise-Croizat, 95100 Ars. Audil, FRANCE
Pentax Kehweizi AB Gindsurtiestrasse 2, 8305 Dietlikon ZH, SWITZERLA-ND
Pentax Svenska AB Box 650, 8-751 27 Uppsala, SWEDEN
Pentax Corporation 35 Inverness Drive East, Englewood, Colorado 80117 U.S.A.
Pentax Canada Inc. 1760 West 3rd Avenue, Vancouver, B.C. VGJ IAFS, Gr. ADA
Asahi Optical Brasileira Ind. e Com. Ltda. Rua Capitão Antonio Rosa 37o, Sala 121 Ed. PBK, São Paulo, BRASIL



Specifications are subject to change without notice.

5/84 • 06256 Printed in Japan

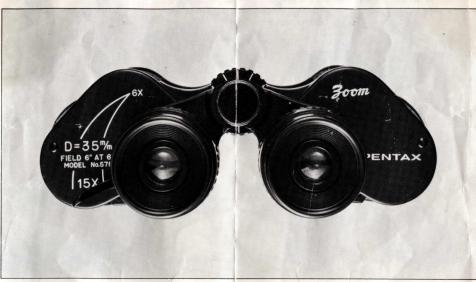

### **BINOCULARS**







O Dioptor adjusting ring

@ Center focusing wheel **8** Left eyepiece O Right eyepiece 6 Zoom lever









## ZCF-BWCF-DCF-NCF If your binoculars are the CF (Center Focusing) type, focus as follows:







- Adjust the spacing between the two eyepieces, as shown in the photo, by acjusting the two barrels until your field of view becomes a single sharp-edged circle.
- 2 Looking through the left eyepiece, bring the object into sharp focus by adjusting the center focusing wheel.
- Then, with your left eye closed, look at the object through the right eyepiece and bring the object into sharp focus by adjusting the dicpter adjusting ring on the right eyepiece.
- After this adjustment has been made, you can focus on any object by merely turning the center focusing wheel.


If your binoculars are the zoom type, focus as follows:




• Adjust the spacing between the two eyepieces.



2 Looking through the left eyepiece, bring the object into sharp focus by adjusting the center focusing wheel.











If your binoculars are IF (Individual Focusing) type with dioptor adjusting rings on both eyepieces, focus as follows:



• Adjust the spacing between the two eyepieces.




O Look at your object with your left eye, and bring the object into sharp focus by adjusting the dioptor ring on the left eyepiece.



Then adjust the right eyepiece by the same method.



### **MONOCULARS**



- Eyepiece and Focusing Ring
- **2** Objective Lens
- Close-Up Lens
- O Close-Up Lens Focusing
- **6** Stand

### **8**x,**30**

As a Telescope (without the Close-Up Lens Attached)

- Hold the eyepiece to your eye and point the lens at the object you are sighting.
- Turn the focusing ring until the object comes clearly into focus.
- 3. Measuring the Distance of Objects
  a) Rotate the monocular until the scale is vertically aligned over the object.
  (Be sure the entire object is visible from top to bottom.)
  b) Distance equals =

size of object scale reading x 80

Read the number on the scale which aligns with the top of the object (2, 1.5, etc.). Divide the height of the object by the scale reading and multiply by 80. The distance in meters of the object measured corresponds roughly to the figure obtained. For example, if the scale reading given is 2, and the object is 10 meters high:

 $\frac{10}{2}$  x 80 = 400 (meters)

The object sighted is approx. 400 meters away. Precalculated distances for objects up to 3 meters





high are given in the following chart.

### Note

- Objects most suited for accurate measurement are those of which heights can easily be estimated such as people (1.5 to 2 meters), automo biles, animals, buildings (where the height is known in advance), etc.
- Distance calculation is most accurate when the exact height of the object is known and it is entirely visible from bottom to top.
- Scale readings are not given at less than 30 meters (the monocular's minimum focusing distance)

As a Microscope (with the 25X Close-Up Lens At ached)

### • Scale Reading (mm)

| - 300            | ne meau | ing thinny |     |              |              |     |    |              |    |  |
|------------------|---------|------------|-----|--------------|--------------|-----|----|--------------|----|--|
|                  | Scale   | 05         | 1   | 1.5          | 2            | 2.5 | 3  | 3.5          | 4  |  |
| Height of Object | 1m      | 160        | 80  | 53           | 40           |     |    |              |    |  |
|                  | 1.5     | 240        | 120 | 80           | 60           | 48  | 40 |              |    |  |
|                  | 2       | 320        | 160 | 107          | 80           | 64  | 53 | 46           | 40 |  |
|                  | 2.5     | 400        | 200 | 133          | 96           | 80  | 67 | 57           | 50 |  |
|                  | 3       | 480        | 240 | 160          | 120          | 96  | 80 | 69           | 60 |  |
|                  |         |            |     | THE STATE OF | 15 37 9 38/1 |     |    | Distance (m) |    |  |

Distance (m)

- Place the monocular over the object and center the object in the middle of the Stand.
- Turn the monocular focusing ring until the scale comes into focus.
- Then, turn the Close-Up Lens focusing ring until the object comes into focus.
- Measure distances with the scale (from 0.1mm to 4mm) as you would with a ruler by centering the scale over the object.

### Note

- As depth of field is shallow at 25X magnification, adjust the position of the object with your fingers or tweezers to focus on different points.
- In places where the Stand would interfere (on construction sites, etc.), use the Close-Up Lens without the stand. In this instance, place the object the same distance from the Close-Up Lens as when using the Stand (approx. cm) and focus.

### 7x,21

As a Telescope (without the Close-Up Lens Attached)

- Hold the eyepiece to your eye and point the lens at the object you are sighting.
- Turn the focusing ring until the object comes clearly into focus.

As a Microscope (with the 22X Close-Up Lens attached)

- Attache the close-up lens and the stand to the monocular.
- Place the monocular over the object and center the object in the middle of the Stand.
- Turn the monocular focusing ring until the object comes into focus.



### Remarks

- Do not leave fingerprints or smears on the surfaces of the objective lenses and eyepieces, especially when storing them for a long period of time. Wipe such stains away periodically with clean cotton cloth or gauze soaked in alcohol.
- Your pinoculars or monocular (except BIF models) are not water-resistant. There are several places where water can get inside and do a great deal of damage. Take care to protect the body from rain or splashing water. If your binoculars or monocular should get wet, dry it off with a clean, soft cloth.
- When not using your binoculars or monocular, it is important to store them in a cool, dry, clean and well-ventilated place.

It's also a good idea to keep your pair of binoculars or monocular in its case while you are not using it.

 Although BIF models are water-resistant, do not purposely dip your BIF binoculars into salt-water or water. If your binoculars should get soaked by salt-water, please clean them with water and dry them off with clean, soft cloth.

| SPECIFIC    | ATION | VS            | \                       | oil     |                   | Brightness Height 8 Wight Field of View at 1000m (m) |           |              |           |      |        |
|-------------|-------|---------------|-------------------------|---------|-------------------|--|-----------|--------------|-----------|------|--------|
|             |       | nification In | nml<br>ter of Objection | ve Lens | of View<br>Relati | Field o  | yiew at 1 | . View at 10 | Height &  |      | Weight |
| LAbe        | Waa   | nir Diame     | Diamere                 | Angle   | Relati            | Field o  | Field     | inch         | cm        | 02.  | 9.     |
| 7x, 35 ZCF  | 7x    | 35mm          | 5.0mm                   | 6.5°    | 25                | 374ft  | 114m      | 5.9×6.7      | 15.0x17.0 | 17.6 | 500    |
| 7x, 50 ZCF  | 7×    | 50mm          | 7.1mm                   | 7.1°    | 50                | 407ft  | 124m      | 7.0×7.9      | 17.8×20.0 | 35.3 | 1000   |
| 8x, 30 ZCF  | 8×    | 30mm          | 3.8mm                   | 7.5°    | 14                | 430ft  | 131m      | 4.4×6.4      | 11.1×16.2 | 18.0 | 510    |
| 10x, 50 ZCF | 10×   | 50mm          | 5.0mm                   | 5.5°    | 25                | 315ft  | 96m       | 6.8×7.9      | 17.3×20.0 | 35.3 | 1000   |
| 12x, 50 ZCF | 12×   | 50mm          | 4.2mm                   | 5.5°    | 18                | 315ft  | 96m       | 6.6x7.9      | 16.7×20.0 | 35.3 | 1000   |
| 16x, 50 ZCF | 16×   | 50mm          | 3.1mm                   | 4.0°    | 10                | 230ft  | 70m       | 6.7×7.9      | 17.0×20.0 | 35.3 | 1000   |
| 7x, 35 BWCF | 7×    | 35mm          | 5.0mm                   | 11.3°   | 25                | 649ft  | 198m      | 4.7×7.2      | 12.0×18.2 | 28.2 | 800    |
| 8x, 40 BWCF | 8×    | 40mm          | 5.0mm                   | 10.0°   | 25                | 574ft  | 175m      | 5.2×7.2      | 13.3×18.2 | 28.9 | 820    |
| 6x, 30 BIF  | 6×    | 30mm          | 5.0mm                   | 8.5°    | 25                | 189ft  | 149m      | 4.9×6.8      | 12.5×17.3 | 21.9 | 620    |
| 7×, 50 BIF  | 7×    | 50mm          | 7.1mm                   | 7.1°    | 50                | 407ft  | 124m      | 7.1×8.2      | 18.0×20.8 | 51.5 | 1460   |
| 8x, 30 BIF  | 8×    | 30mm          | 3.8mm                   | 8.5°    | 14                | 189ft  | 149m      | 4.9x6.8      | 12.5×17.3 | 21.9 | 620    |
| 7x, 20 DCF  | 7×    | 20mm          | 2.9mm                   | 7.5°    | 8.4               | 430ft  | 131m      | 3.8x3.9      | 9.7×10.0  | 6.4  | 182    |
| 9x, 20 DCF  | 9×    | 20mm          | 2.2mm                   | 6.2°    | 4.8               | 354ft  | 108m      | 3.6x3.9      | 9.1×10.0  | 6.7  | 190    |
| 8x, 30 DCF  | 8x    | 30mm          | 3.8mm                   | 7.0°    | 14.4              | 400ft  | 122m      | 4.8×4.7      | 12.3×11.9 | 16.9 | 480    |
| 9x, 30 DCF  | 9x    | 30mm          | 3.3mm                   | 6.7°    | 10.9              | 384ft  | 117m      | 5.6x4.7      | 14.2×11.9 | 18.3 | 520    |
| 8x, 24 MCF  | 8x    | 24mm          | 3.0mm                   | 6.5°    | 9.0               | 374ft  | 114m      | 4.4×4.3      | 11.2×11.0 | 12.0 | 340    |
| 10x, 24 MCF | 10×   | 24mm          | 2.4mm                   | 5.1°    | 5.8               | .95ft  | 90m       | 4.2x4.3      | 10.8×11.0 | 11.6 | 330    |

### Remark

- 6x, 30 BIF and 8x, 30 BIF binoculars are available with sp≥cial rubberized coating for maximum protection against rough seas or foul weather.
- 6x, 30 BIF, 8x, 30 BIF and 7x, 50 BIF binoculars can be ordered with a size/distance scale in the eyepiece.
- BIF water-resistance specifications: After 5 minutes under 0.2 kg per sq cm air-pressure, water leakage into the binoculars will be less than 5% without moving the eyepiece.

• 9

8.